

NEW DAILY 70C

NEW DAILY  
**BUSINESS** ↗  
**INSTINCT**



**E6**

The new Daily E6 70C Van is the right choice to develop your business. With its new Euro 6 engine providing exceptional fuel consumption and cost of ownership, combined with increased class leading comfort, the new Daily E6 70C Van is your perfect business partner.

**IVECO**

Your partner for sustainable transport

# DAILY SPECIFICATIONS 70C

## DIMENSIONS (mm)

<b>X</b>	Wheelbase	4100	4100	4100L
<b>H</b>	Overall height unladen	H2/ 2850	H3/ 3050	H3/ 3050
<b>K</b>	Overall length	7224	7224	7619
	Front track	1725	1725	1725
	Rear track	1660	1660	1660
<b>Y</b>	Rear overhang	2116	2116	2511
	Turning circle: kerb to kerb	14108	14108	14108
	Turning circle: wall to wall	14758	14758	14758

## CARGO AREA (mm)

	Volume (m <sup>3</sup> )	16	18	20
	Internal length	4680	4680	5125
	Internal width	1740	1740	1740
	Internal height	1900	2100	2100
<b>T</b>	Height of loading floor	901	910	919
	Wheel house distance (int.)	1032	1032	1032
	Rear door opening width	1530	1530	1530
	Rear door opening height	1800	2000	2000
	Side door opening width	1260	1260	1260
	Side door opening height	1800	1800	1800

## MASS (kg)

GVM	7000	7000	7000
GCM	10500	10500	10500
Towing capacity with braked trailer	3500	3500	3500
Front axle capacity	2500	2500	2500
Rear axle capacity	5350	5350	5350
Kerb mass front axle	1522	1551	1520
Kerb mass rear axle	1414	1472	1556
Kerb mass total*	2936	3023	3076
Payload capacity	4064	3977	3924

\* Kerb masses are with minimal fuel, spare wheel, tools and no driver.

## ENGINE

**Type:** I80 hp IVECO FIC (EURO VI) – 4 stroke diesel with direct-injection, Variable Geometry Turbocharger (VGT) and intercooler

**Maximum Output:** 180 hp/134 kW @ 2800-3500 rpm

**Maximum Torque:** 317 lb ft/430 Nm @ 1500-3000 rpm

**Emissions Technology:** Exhaust Gas Recirculation system + Selective Catalytic Reduction

**Total Displacement:** 3.0 litre

**Exhaust:** Horizontally positioned muffler on the right side and tailpipe located mid-way down right side of vehicle

## FRONT AXLE & SUSPENSION

IVECO 5823

**Suspension Capacity:** 2500 kg

**Suspension Type:** Independent with adjustable steel torsion bar

**Axle Capacity:** 2500 kg

## REAR AXLE & SUSPENSION

IVECO 450517 full-floating single reduction

**Suspension Capacity:** 5350 kg

**Suspension Type:** Rear parabolic spring

**Optional:** ECAS - Rear air suspension

**Axle Capacity:** 5350 kg

**Rear Axle Ratio:** 4.30:1

**Optional:** Driver Controlled Differential Lock

## BRAKES

**Type:** ESP 9 + ABS + ASR 9 with EBD (Electronic Brake force Distribution) and Hill Holder

**Front / Diameter:** Disc brakes / 301 mm

**Rear / Diameter:** Disc brakes / 306 mm

**Parking Brake:** Manual brake operating on rear axle

**Service Brakes:** Dual circuit with vacuum servo

- Pad wear warning light for front and rear brakes

## STEERING


- Power steering
- 390 mm diameter steering wheel with telescopic adjustment

## FUEL SYSTEM

- 70 litres with fuel cap location on passenger side and 24 litre AdBlue tank

## CHASSIS

- C Section steel longitudinal side members and tubular cross members

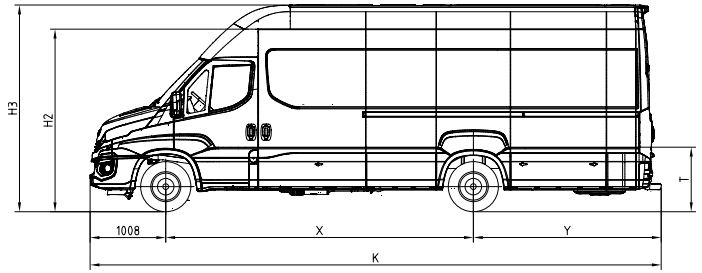

## TRANSMISSION

- 6 speed synchromesh single overdrive manual transmission

**Type:** 2840.6 OD

1st 5.375, 2nd 3.154, 3rd 2.041, 4th 1.365, 5th 1.000, 6th 0.791 OD, Rev. 4.838

**Optional:**

- 8 Speed ZF Torque Converter Automatic (Hi-Matic with ECO mode)

**Type:** 8V470A

1st 4.696, 2nd 3.130, 3rd 2.104, 4th 1.667, 5th 1.285, 6th 1.000, 7th 0.839 OD, 8th 0.667 DOD, Rev. 3.297

## CLUTCH

- Single dry plate
- Hydraulically controlled

**Diameter:** 280 mm

## ELECTRICAL SYSTEM

**Battery:** 12V – 110 Ah

**Smart Alternator:** 12V – 180 A

- Trailer wiring to rear of chassis

## WHEELS & TYRES

**Wheels:** Steel 6J x R16

**Tyres:** 225/75 R16

## CABIN FEATURES

- Driver, passenger and curtain airbags with seat belt pretensioners
- Fixed driver seat with extractable table and storage underneath
- Dual bench passenger seats
- Electric windows
- Automatic climate control
- Exterior mirror with integrated wide angle and direction indicators, heated and electronically adjustable
- IVECONNECT multimedia system with reverse camera including MP3 player, USB and AUX connectivity, bluetooth with steering controls
- Overhead console with storage shelf
- Large dual storage pockets in doors
- Document storage compartment
- 2 x beverage holders

## DASHBOARD

- Analogue speedometer
- Analogue tachometer
- Fuel level indicator with reserve light indicator
- Coolant temperature indicator with high temperature indicator light
- Instrument light dimmer switch
- Dash-mounted gear lever
- 3 x storage areas on top of dash
- LCD Display Panel includes: odometer, trip computer with distance, time, fuel consumption, headlamp orientation, clock, speed limit exceeding, external temperature and service indicator

## SECURITY

- Central locking with remote control
- Steering lock

## LOAD AREA

- Floor – steel ribbed with load lashing rings
- Sides – reinforced with load lashing rings
- Side access via top hung side sliding door, internal step and grab handle
- Rear access by hinged doors with stops at 90° and 270° (grab handle 2 x)
- Interior lights at side and rear (door operated with individual isolation)
- Rear doors with windows

## OPTIONS

- Dual sliding doors
- Heated, suspended and fully adjustable driver and single passenger seat
- Full bulkhead with window
- Lane departure warning
- Reverse camera